

# PUKHET DATASHEET



## PUKHET

	W	K	Lm	mA	Colour	
30550093W	10W	3000K	870	250	Matt White	1/50
30550093N	10W	3000K	870	250	Matt Black	1/50
30550094W	10W	4000K	920	250	Matt White	1/50
30550094N	10W	4000K	920	250	Matt Black	1/50



220-240 V  
50-60 Hz  
CRI >90



### ADDITIONAL TECHNICAL DATA


#### LED CHIP

Light Source	LUMILEDS L2C4
Color Temperature	3000K / 4000K
Colour Rendering Index	CRI >90
Led Lifespan	L70>54.000h
Photobiological safety	RG1



#### DRIVER

Model	3AA HYL
Input Voltage	220/240V-50/60hz
Output Voltage	30-42Vdc / 55Vdc max
Output Current	250mA
Efficiency	<90%
Temperature Index	Ta:50° Tc:80°
Connection type	Terminal block / 0.75-1.5 mm <sup>2</sup>
Flickering	1%

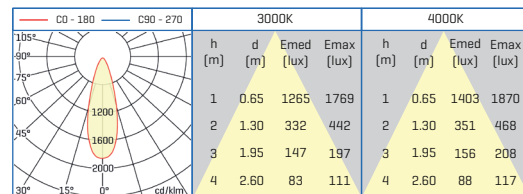

BODY ALU

REFLECTOR PMMA

# PUKHET

## DATASHEET

SQUARE



### PUKHET Square

	W	K	Lm	mA	Colour	
30790093W	9W	3000K	870	250	Matt White	1/50
30790093N	9W	3000K	870	250	Matt Black	1/50
30790094W	9W	4000K	920	250	Matt White	1/50
30790094N	9W	4000K	920	250	Matt Black	1/50




### ADDITIONAL TECHNICAL DATA

#### LED CHIP

Light Source	LUMILEDS L2C4
Color Temperature	3000K / 4000K
Colour Rendering Index	CRI >90
Led Lifespan	L70>54.000h
Photobiological safety	RG1

#### DRIVER

Model	3AA HYL
Input Voltage	220/240V-50/60hz
Output Voltage	30-42Vdc / 55Vdc max
Output Current	250mA
Efficiency	<90%
Temperature Index	Ta:50° Tc:80°
Connection type	Terminal block / 0.75-1.5 mm <sup>2</sup>
Flickering	1%

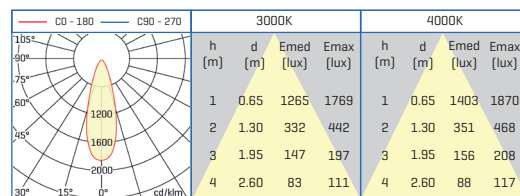

BODY ALU

REFLECTOR PMMA