



# SIXTY DATA SHEET



## SIXTY

		Lm/W	W	K	mA	Flux	LOR	☐
30140403		85W	40W	3000K	850	6075	56%	1/5
30140404		90W	40W	4000K	850	6430	56%	1/5
30770403	☉ DIM 1-10V	85W	40W	3000K	850	6075	56%	1/5
30770404	☉ DIM 1-10V	85W	40W	4000K	850	6430	56%	1/5
30780403	☉ DIM DALI / PUSH	90W	40W	3000K	850	6075	56%	1/5
30780404	☉ DIM DALI / PUSH	85W	40W	4000K	850	6430	56%	1/5

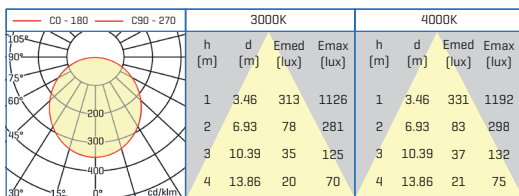

Glare Evaluation According to UGR													
p Ceiling		70	70	50	50	30	70	70	50	50	30	30	
p Walls		50	30	50	30	30	50	30	50	30	50	30	
p Floor		20	20	20	20	20	20	20	20	20	20	20	
Room size X Y	Viewing direction at right angles to lamp axis						Viewing direction parallel to lamp axis						
	2H	2H	16.4	17.8	18.7	18.0	18.2	18.6	17.9	16.9	18.2	18.4	
3H	3H	18.1	19.3	18.4	19.6	19.9	18.3	19.5	18.6	19.8	20.1		
4H	4H	18.9	20.0	19.2	20.3	20.6	19.0	20.2	19.4	20.5	20.8		
6H	6H	19.4	20.5	19.8	20.8	21.1	19.7	20.7	20.0	21.0	21.4		
8H	8H	19.7	20.7	20.0	21.0	21.3	19.9	20.9	20.2	21.2	21.6		
12H	12H	19.8	20.8	20.2	21.1	21.5	20.0	21.0	20.4	21.4	21.7		
4H	2H	17.1	18.3	17.5	18.6	18.9	17.2	18.4	17.6	18.7	19.0		
3H	3H	19.0	20.0	19.4	20.3	20.7	19.2	20.2	19.5	20.5	20.8		
4H	4H	19.9	20.8	20.3	21.1	21.5	20.1	20.9	20.5	21.3	21.7		
6H	6H	20.6	21.4	21.0	21.8	22.2	20.8	21.6	21.2	22.0	22.4		
8H	8H	20.9	21.6	21.3	22.0	22.4	21.1	21.8	21.5	22.2	22.6		
12H	12H	21.1	21.8	21.6	22.2	22.6	21.3	22.0	21.8	22.4	22.8		
8H	4H	20.2	21.0	20.7	21.4	21.8	20.4	21.1	20.8	21.5	21.9		
6H	6H	21.1	21.7	21.6	22.2	22.6	21.3	21.9	21.8	22.3	22.8		
8H	8H	21.6	22.0	22.0	22.6	23.0	21.7	22.2	22.2	22.6	23.1		
12H	12H	21.8	22.3	22.3	22.7	23.2	22.0	22.4	22.5	22.9	23.4		
4H	4H	20.3	20.9	20.7	21.3	21.8	20.4	21.1	20.9	21.5	21.9		
6H	6H	21.2	21.7	21.7	22.2	22.7	21.4	21.9	21.9	22.3	22.8		
8H	8H	21.6	22.1	22.1	22.6	23.1	21.8	22.2	22.3	22.7	23.2		
Variation of the observerposition for the luminaire distance S													
S = 1.0H		+0.1 / -0.1			+0.1 / -0.1								
S = 1.5H		+0.2 / -0.3			+0.2 / -0.3								
S = 2.0H		+0.3 / -0.6			+0.3 / -0.6								
Standard table		BK07			BK07								
Correction summand		4.6			4.6								
Corrected glare indices referring to 3403lm total luminous flux													

BODY ALU COLOUR: Blanco Mate / Matt White / Blanc Mat



## ACCESSORIES

<b>30012100S</b>	Sixty Suspension Kit	📦	1
------------------	----------------------	---	---

1m length [adjustable]  
Quick adjustment



<b>30140001</b>	Sixty Recessed Kit	1
-----------------	--------------------	---



<b>30140000</b>	Sixty Surface Kit	[Aluminium]	📦	1
-----------------	-------------------	-------------	---	---

