

TUBULAR

DATASHEET




TUBULAR Linkable 42W

	W	K	Lm	
30960424LK	42W	4000K	4200	1/6

LED SMD |
 220-240 V 50-60 Hz CRI >80 |
 CE |
 FAST CONNECTOR |
 IK 10 |
 IP 66 |
 PF > 0,9 |
 NO DIM |
 ON OFF > 30.000 |
 36.000 h. |
 120° |
 POLYCARBONATE |
 DRIVER INCL

3 YEARS GUARANTEE




- Conexión lineal
- Linkable
- Câblage traversant
- Collegabile
- Verknüpfbar



FAST CONNECTOR DETAILS

Cable diameter: Ø4-11mm
 Cable measures: 10-12mm, Ø 0.5-2.5mm²
 MAX 55, MAX 48, 9.920

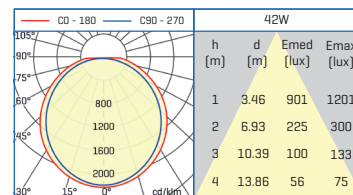

ACCESSORIES

30960000	Suspension Kit	1



BODY **INOX** COLOUR: White

DIFFUSER **PC**



TUBULAR

DATASHEET




TUBULAR Linkable 63W

	W	K	Lm	
30960634LK	63W	4000K	6300	1/6

LED SMD |
 220-240 V 50-60 Hz CRI >80 |
 CE |
 FAST CONNECTOR |
 IK 10 |
 IP 66 |
 PF > 0,9 |
 NO DIM |
 ON/OFF > 30.000 |
 36.000 h. |
 120° |
 POLYCARBONATE |
 DRIVER INCL

3 YEARS GUARANTEE




- Conexión lineal
- Linkable
- Câblage traversant
- Collegabile
- Verknüpfbar



FAST CONNECTOR DETAILS

Cable diameter: Ø4-11mm
 Cable measures: 10-12mm, Ø 0.5-2.5mm²
 Dimensions: 27, 24, MAX 55, MAX 48, 9.920, Ø26.6

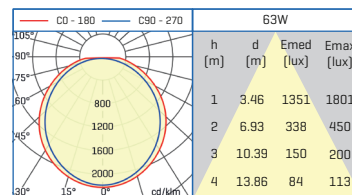

ACCESSORIES

30960000	Suspension Kit	1
----------	----------------	---



BODY **INOX** COLOUR: White

DIFFUSER **PC**

