



VEGA DATASHEET

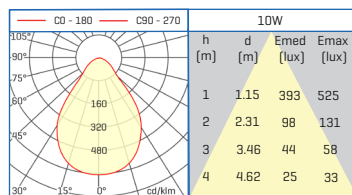


VEGA 10W

| | W | K | Lm | Colour | ☐ |
|-----------|-----|-------|-----|------------|------|
| 30650104W | 10W | 4000K | 800 | Matt White | 1/20 |
| 30650104N | 10W | 4000K | 800 | Matt Black | 1/20 |



DIMENSIONS IN MILLIMETERS

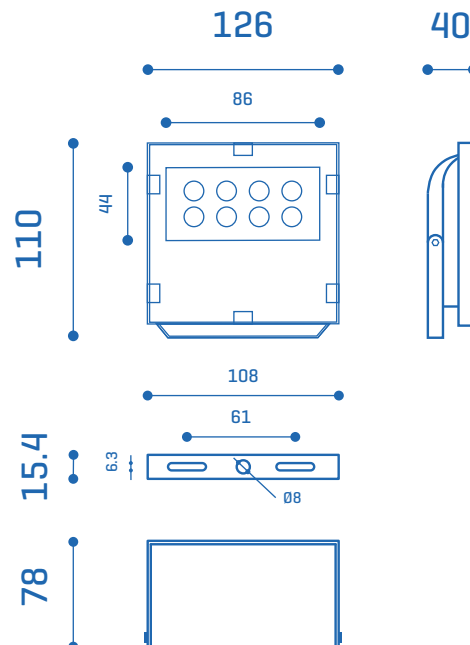

BODY ALU

REFLECTOR PC


T6

VEGA DATASHEET




VEGA 30W

| | W | K | Lm | Colour | |
|-----------|-----|-------|------|------------|------|
| 30650304W | 30W | 4000K | 2400 | Matt White | 1/10 |
| 30650304N | 30W | 4000K | 2400 | Matt Black | 1/10 |

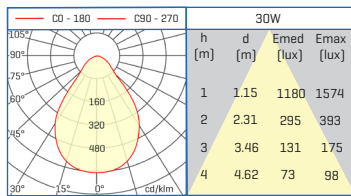

DIMENSIONS IN MILLIMETERS

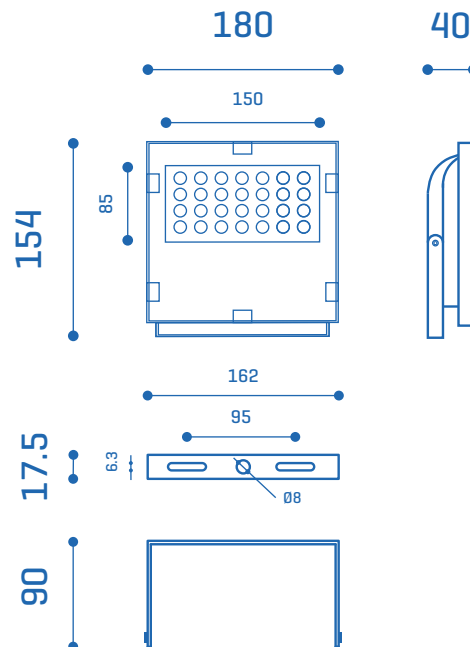

BODY ALU

REFLECTOR PC


T6

VEGA DATASHEET




VEGA 50W

| | W | K | Lm | Colour | |
|-----------|-----|-------|------|------------|------|
| 30650504W | 50W | 4000K | 4000 | Matt White | 1/10 |
| 30650504N | 50W | 4000K | 4000 | Matt Black | 1/10 |

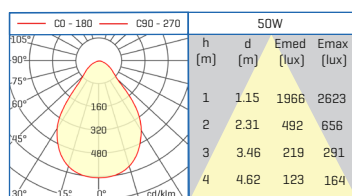

DIMENSIONS IN MILLIMETERS

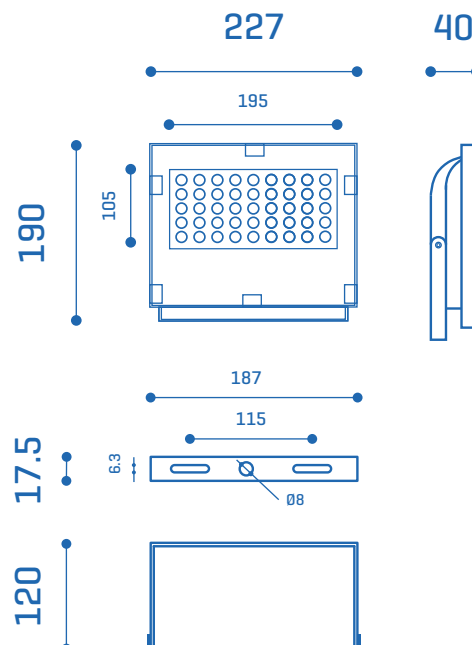

BODY ALU

REFLECTOR PC

T6

VEGA DATASHEET




VEGA 100W


| | W | K | Lm | Colour | |
|-----------|------|-------|------|------------|-----|
| 30651004W | 100W | 4000K | 8000 | Matt White | 1/4 |
| 30651004N | 100W | 4000K | 8000 | Matt Black | 1/4 |

|
 |
 100-265 V
50-60 Hz
CRI >80

-20+50°C |
 0.95 |
 5 mm |
 |
 1 m |
 PF > 0.9 |
 IP 65 |
 IK 07 |
 NO DIM |
 ANTI-GLARE |
 >50.000 |
 35.000 h. |
 60° |
 DRIVER INCL

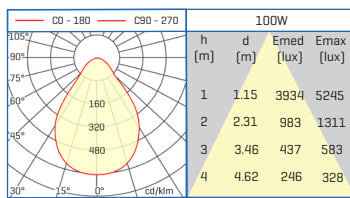

DIMENSIONS IN MILLIMETERS

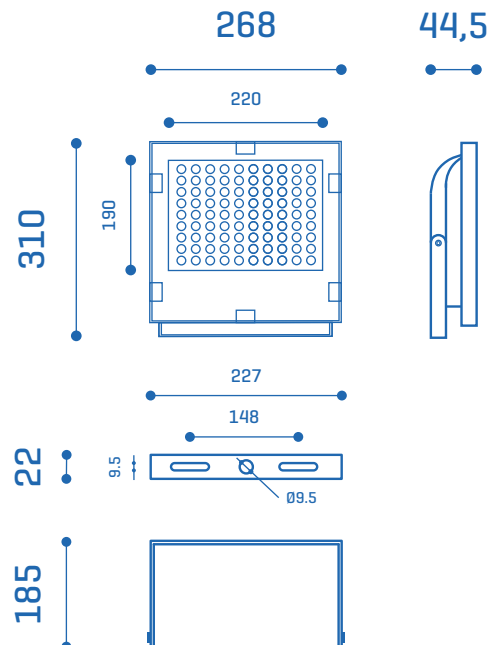

BODY ALU

REFLECTOR PC


T6

VEGA DATASHEET




VEGA 150W

| | W | K | Lm | Colour | |
|-----------|------|-------|-------|------------|-----|
| 30651504W | 150W | 4000K | 12000 | Matt White | 1/3 |
| 30651504N | 150W | 4000K | 12000 | Matt Black | 1/3 |

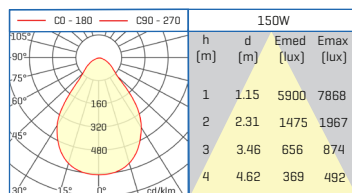

DIMENSIONS IN MILLIMETERS

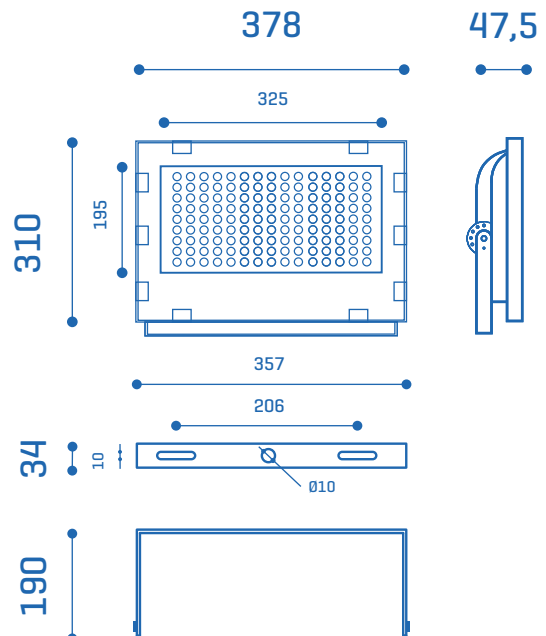

BODY ALU

REFLECTOR PC

T6

VEGA DATASHEET





VEGA 200W

| | W | K | Lm | Colour | |
|-----------|------|-------|-------|------------|-----|
| 30652004W | 200W | 4000K | 16000 | Matt White | 1/2 |
| 30652004N | 200W | 4000K | 16000 | Matt Black | 1/2 |

|
 |
 100-265 V
50-60 Hz
CRI >80

-20+50°C |
 0.95 |
 5 mm |
 |
 1 m |
 > 0,9 |
 IP 65 |
 IK 07 |
 NO DIM |
 ANTI-GLARE |
 ON/OFF |
 35.000 h. |
 60° |
 DRIVER INCL

DIMENSIONS IN MILLIMETERS

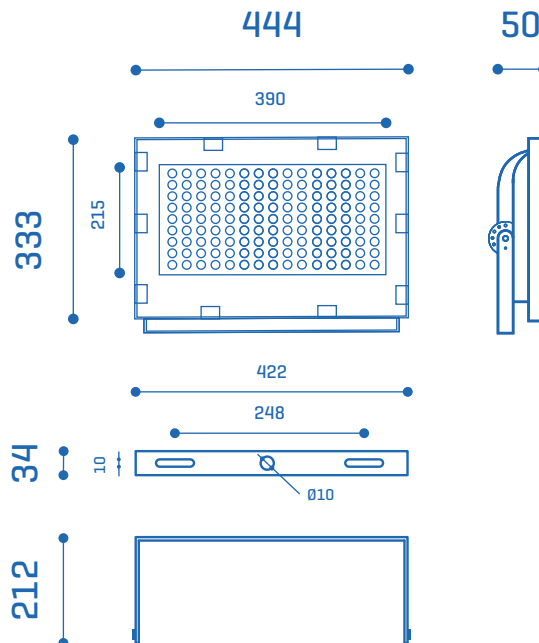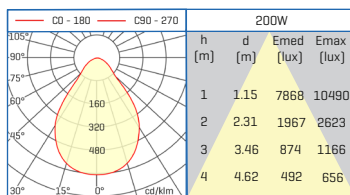

BODY ALU

REFLECTOR PC

T6